


Observe protection note according to DIN34

SM 422; DO 32 x DC 24V/0,5A
DIGITAL OUTPUT

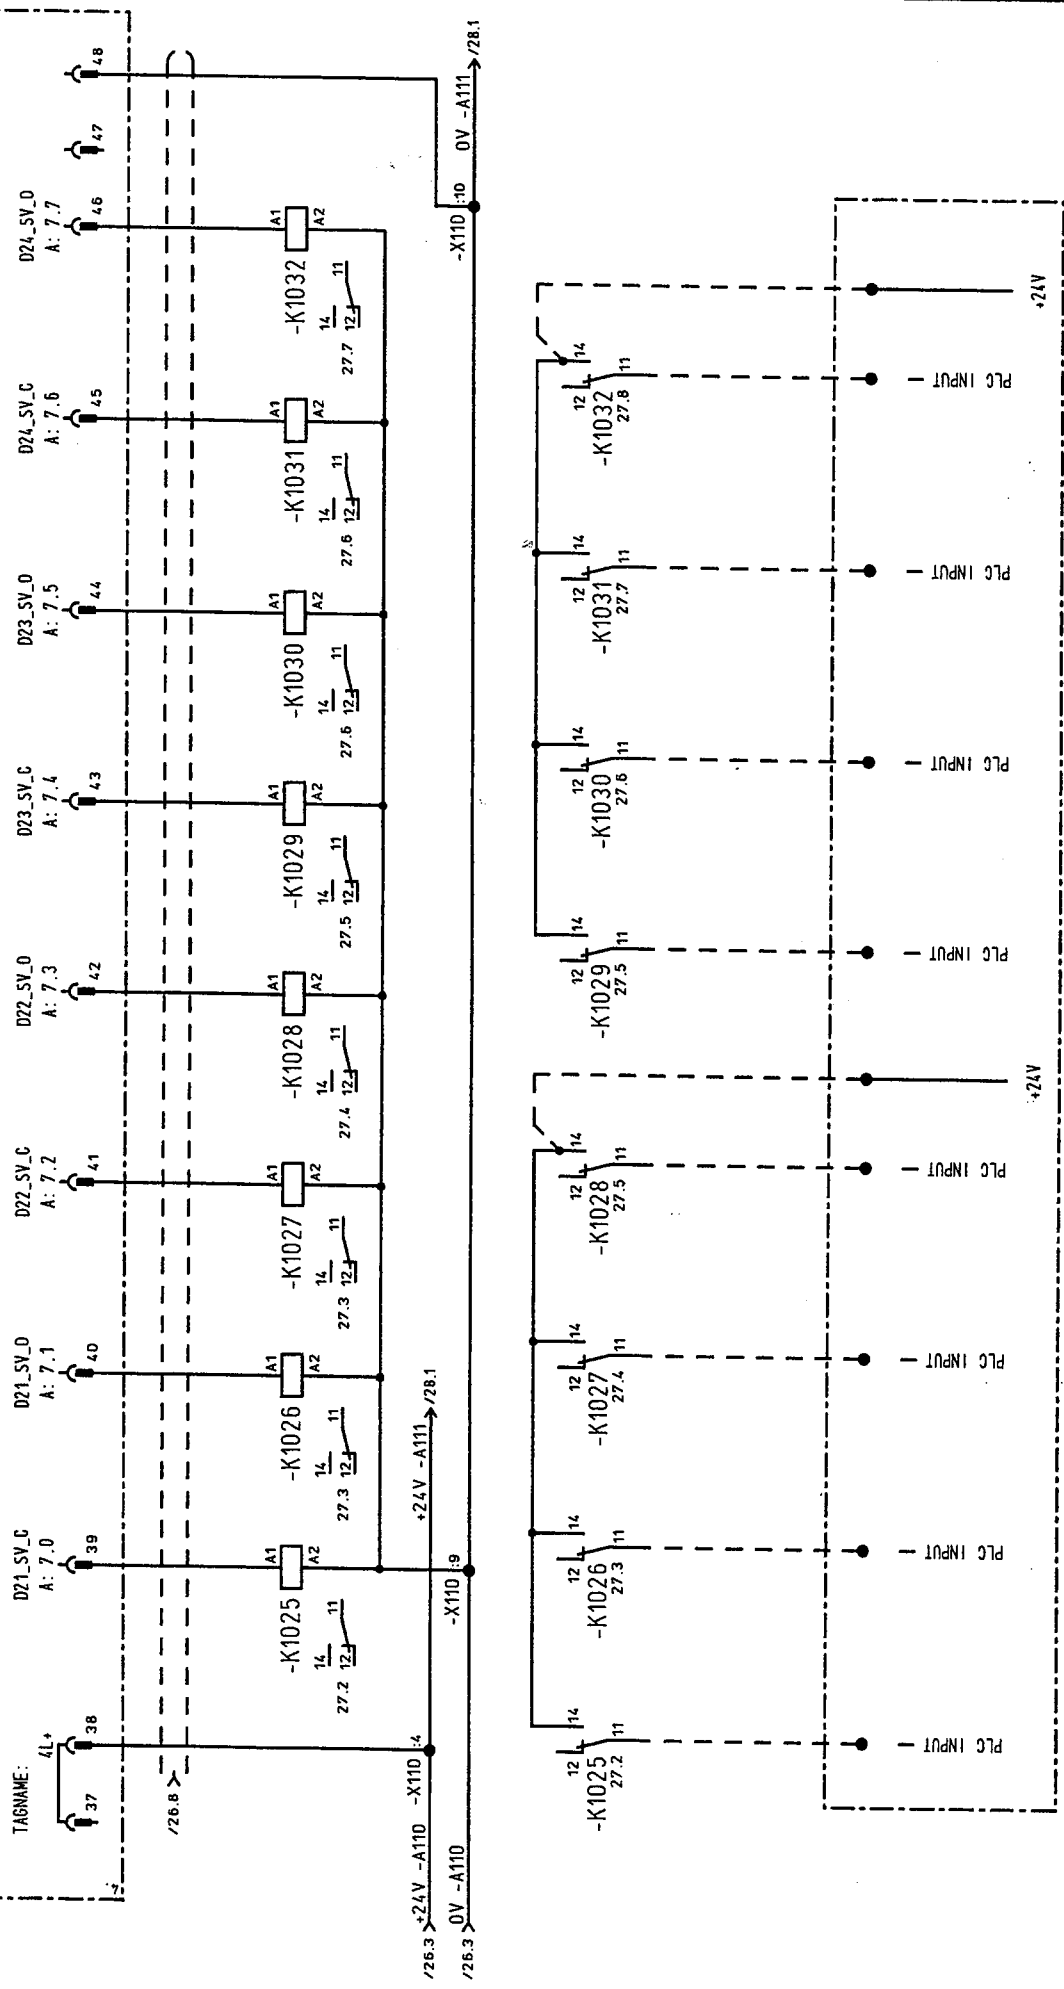

PRESENT PLC / DIGITAL INPUTS

- LOADING MID PS D21 CLOSING D21 OPENING
- STOPP LOADING AFT SB D22 CLOSING D22 OPENING
- LOADING AFT PS D23 CLOSING D23 OPENING
- SIDE DISCHARGE SB D24 CLOSING D24 OPENING

date	16.02.2005	res. from:	LSB Keto
desig.	Hinrichsmeyer	subst. for:	Josef Möbius
check	Härner		
norm			
name			
revision			
Boggerautomatik DREDGER AUTOMATIC CIRCUIT DIAGRAM			
			271195 627 STR
			-E1
			sheet 27
			total